




عرفانو بی سی



.com

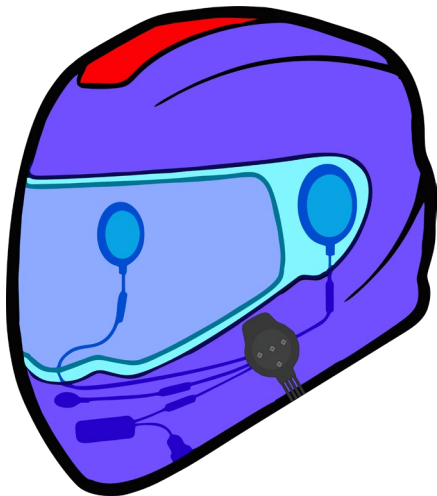

+989031002048



erfanobcc@gmail.com

کد محصول

بلوتوث کلاه کاسکت

- ✓ یکسال گارانتی
- ✓ تا ۱۰ متر شعاع آنتن دهی
- ✓ نسخه بلوتوث EDR + 5.0
- ✓ دارای میکروفون و نویز کنسلینگ
- ✓ خدمات پس از فروش تعویض و تعمیر قطعات
- ✓ قابلیت تماس مستقیم از طریق بلوتوث به آخرین شماره تلفن
- ✓ 17+ ساعت طول عمر باتری در حالت استفاده به صورت متوالی

اطلاعات بیشتر


- 1_ ظرفیت باتری: 1000 میلی آمپر
- 2_ طول عمر باتری در صورت استفاده به صورت یکسره: بیش از 17 ساعت
- 3_ مدت شارژ شدن کامل باتری، وابسته به نوع سیم و آداپتور: حداکثر ۴ ساعت
- 4_ تون خروجی: 35 مگاوات
- 5_ فرکانس بی سیم: 2.401-2.480 گیگاهرتز
- 6_ پشتیبانی از نسخه بلوتوث 3.0 رو به پایین و سازگار با نسخه 5.0 بلوتوث
- 7_ پشتیبانی از جابجایی خودکار به مکالمه ورودی
- 8_ توانایی شماره گیری مجدد آخرین شماره در تلفن
- 9_ سازگار با استانداردهای ROHS
- 10_ فرکانس خروجی: class2
- 11_ فرکانس کاری: 2.4Ghz – 2.4835Ghz
- 12_ فناوری کاهش نویز: پردازش سیگنال دیجیتال DPS
- 13_ پشتیبانی از عملکرد A2DP
- 14_ قابلیت‌های کنترل از راه دور AVRCP

فهرست مطالب

اطلاعات کامل راجع به کیت.....	صفحه 1
عملکرد کلیدها و نشانگر LED	صفحه 2
نحوه نصب بر روی کلاه کاسکت.....	صفحه 3
برگه گارانتی.....	صفحه 4

عملکرد کلید ها

- 1- (روشن / خاموش)
روشن و خاموش ➔ سه ثانیه فشار طولانی
- 2- (پخش / مکث / پاسخ به تماس / رد تماس / شماره گیری)
پخش / مکث ➔ فشار کوتاه
پاسخ به تماس ➔ فشار کوتاه
رد کردن تماس ➔ فشار طولانی
شماره گیری آخرین شماره ➔ دوبار فشار متداوم
نکته: در صورت کار نکردن این دکمه ، یکبار کلید 1 (روشن / خاموش) را بزنید سپس مجدد کلید مورد نظر را فشار دهید.

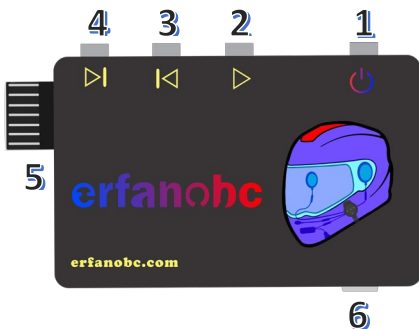

- 3- (بعدی / بلند شدن صدا)
بعدی ➔ فشار کوتاه
بلند شدن صدا ➔ فشار طولانی
- 4- (قبلی / کم شدن صدا)
قبلی ➔ فشار کوتاه
کم شدن صدا ➔ فشار طولانی

- 5- ولوم صدا
نکته: در صورت باز بودن پیچ ولوم ، شارژ باتری تخلیه خواهد شد حتی اگر دستگاه خاموش باشد. پس بعد از استفاده ، پیچ ولوم را حتما ببندید.

- 6- محل شارژ ، در زیر کیت ، قسمت سیم ها است.

نشانگر LED

- نور آبی و قرمز چشمک زن سریع ➔ آماده برای اتصال
(نور آبی چشمک زن آهسته ➔ متصل شده)
قرمز ➔ در حال شارژ
آبی ➔ شارژ شده



نحوه نصب بر روی کلاه

تمامی کلاه کاسکت ها ، داخل کلاه در قسمت محل قرار گیری گوش ، جای خالی وجود دارد. این قسمت در اکثر کلاه کاسکت ها ، فضای کافی برای نصب اسپیکر دارد. اما در بعضی از کلاه ها ، جای اسپیکر در نظر گرفته شده است و اگر لبر های کلاه را بیرون بیاورید ، قسمتی جهت نصب اسپیکر تعبیه شده است. (طراحی شدن قسمت اسپیکر بیشتر در کلاه کاسکت های خارجی دیده میشود.)

این محصول شامل یک محفظه مستطیل شکل است که در آن برد بلوتوث ، باتری و دیگر تشکیلات است. از این قسمت دو سیم نری AUX برای اتصال به دو اسپیکر (که یکی بلند برای گوش راست و دیگری کوتاه برای گوش چپ است) و همچنین یک سیم انعطاف پذیر با کیفیت که میکروفون است ، خارج شده است.

برای نصب این محصول بر روی کلاه کاسکت کافیسیت ، برچسب پشت کیت بلوتوث (محفظه مستطیل شکل) را کنده و در سمت چپ کلاه کاسکت ، بچسبانید.


برچسب اسپیکر ها را جدا کرده و در داخل کلاه ، قسمت قرار گرفتن گوش ها ،

بچسبانید. (اگر کلاه کاسکت شما قسمتی برای نصب اسپیکر دارد ، لبر های کلاه را جدا کرده و سپس اسپیکر ها را بچسبانید.)

بعد از اتمام این دو مرحله ، دو سیم AUX را به اسپیکر ها متصل کنید. سپس اقدام به مخفی سازی سیم ها کنید.

نکته : نصب و مخفی سازی سیم ها را به صورتی انجام دهید که ، چیزی تحت فشار یا قطعی نباشد.

در صورتی که کلاه کاسکت فک ثابت دارید ؛ میتوانید میکروفون را به حالت دلخواه مخفی سازی کنید. اگر هم کلاه کاسکت بدون فک و یا فک متحرک دارید ، کافیسیت میکروفون را رو به روی صورت قرار دهید.

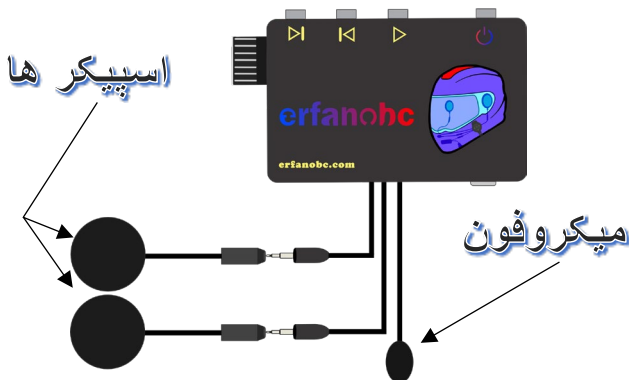

برگه گارانتی

مشتري گرامي ؛ براي فعال سازي گارانتی يكساله ؛ لطفا فاميل و شماره تلفن خود را همراه با كد محصول ، به شماره تلفن 09031002048 پيامك كنيد و يا به جيميل erfanobcc@gmail.com ايميل كنيد.

با كمال احترام درصورت ارسال ننمودن موارد فوق تا يك هفته ، گارانتی شامل محصول شما نمی شود.

مقدار زمان گارانتی: يكسال (از زمان خريد محصول)

پوشش گارانتی: نفوذ آب به داخل كيت بلوتوث - هر نوع مشكل خود به خود به وجود آمده - هر نوع قطعی و مشكل در هر قسمت قبل از نصب - هر نوع مشكل به وجود آمده كه فراد در آن دست ندانسته اند.

شرایط عدم شمول گارانتی: ارسال ننمودن اطلاعات درخواستی در زمان مشخص شده - باز شدن دستگاه توسط فرد غير مجاز - هر نوع آسیب دیدگی اسپيكر ها (نفوذ آب ، ضربه و ...) - هر نوع ضربه فیزیکی به كيت بلوتوثی - تغيير شكل غير عادی هر قسمت (گرما ، سرما و ...) - به وجود آمدن قطعی در هر قسمت بخاطر نصب نامناسب - عدم ارسال فاكترور يا برگ گارانتی مهر شده توسط فروشنده - اتمام مدت گارانتی


ارتباط با خدمات پس از فروش: شما ميتوانيد براي ارتباط با خدمات پس از فروش ، به شماره همراه يا جيميل درج شده در كاتالوگ رجوع كنيد.

تذکر 1: مسئولیت و كليه هزینه های مربوط به ارسال محصول به مركز گارانتی و خدمات ، همچنين برگشت آن به عهده مشتری می باشد.

تذکر 2: فاكترور يا برگ گارانتی مهر شده توسط فروشنده ، همراه دستگاه معيوب ارسال گردد.

كيت بلوتوث كلاه كاسكت عرفانو بی سی كد در تاريخ
توسط آقای/ مغازه به
تحویل شد .
امضا / مهر

از خريد شما صميمانه قدر دانی ميكنيم و مشتاقانه منتظر خدمت دوباره به شما هستيم.

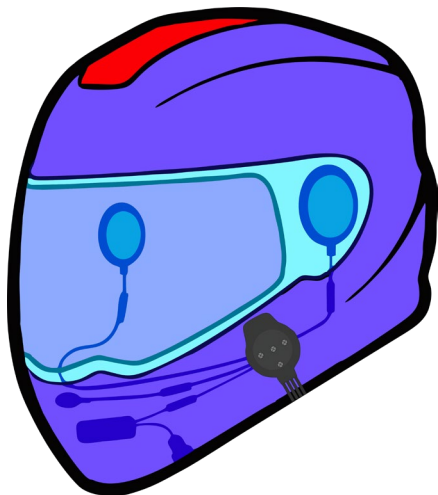

erfanobc



.com



+989031002048



erfanobcc@gmail.com

product cod

Table of Contents

Complete Information about the Kit	Page 1
Button Functions and LED Indicator	Page 2
Installation Method on Helmet	Page 3
Warranty Page	Page 4

Bluetooth Helmet Kit

- ✔ One-Year Warranty
- ✔ Up to 10 Meters of Antenna Range
- ✔ Bluetooth 5.0 + EDR Version
- ✔ Equipped with Microphone and Noise-Canceling Technology
- ✔ After-Sales Service with Replacement and Repair Options
- ✔ Direct Call Capability via Bluetooth to the Last Dialed Number
- ✔ Over 17 Hours of Continuous Battery Life

more information

- 1_ Battery Capacity: 1000 mAh
- 2_ Battery Life (Continuous Use): Over 17 Hours
- 3 Full Charge Time (Depending on Cable and Adapter): Up to 4 Hours
- 4_ Output Power: 35 mW
- 5_ Wireless Frequency: 2.401–2.480 GHz
- 6_ Bluetooth Compatibility: Supports Bluetooth 3.0 and Below, Compatible with Bluetooth 5.0
- 7_ Auto-Switch to Incoming Call Support
- 8_ Redial Last Number Capability
- 9_ ROHS Standards Compliance
- 10_ Output Class: Class 2
- 11_ Operating Frequency: 2.4 GHz – 2.4835 GHz
- 12_ Noise Reduction Technology: Digital Signal Processing (DSP)
- 13_ A2DP Function Support
- 14_ Remote Control Capabilities (AVRCP)

Key Functions

1- (Power On/Off)

Turn On/Off → Long Press (3 Seconds)

2- (Play / Pause / Answer Call / Reject Call / Redial)

Play / Pause → Short Press

Answer Call → Short Press

Reject Call → Long Press

Redial Last Number → Double Press

Note: If the button doesn't work, press Key 1 (Power On/Off) once, then try the desired key again.

Next Track → Short Press

Increase Volume → Long Press

4- (Previous / Volume Down)

Previous Track → Short Press

Decrease Volume → Long Press

5- Volume button

Note: If the volume button is left open, the battery will drain even when the device is off. Always close the volume button after use.

6- Charging Port

Located under the kit, near the cables.


LED Indicators

Rapidly Flashing Blue and Red Lights → Ready for Connection

(Slowly Flashing Blue Light → Connected)

Red Light → Charging

Blue Light → Fully Charged

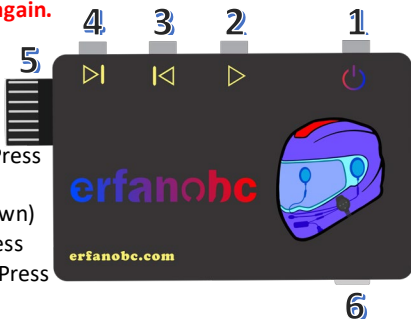

How to Install on a Helmet


All helmets have an empty space inside, near the ear area, where the speaker can be installed. This space provides sufficient room for speaker placement in most helmets. However, some helmets (especially imported ones) are pre-designed with a dedicated speaker compartment. If you remove the foam padding from these helmets, you'll find a section specifically made for speaker installation. This product includes a rectangular enclosure containing the Bluetooth board, battery, and other components. From this enclosure, two male AUX cables extend—one longer for the right ear speaker and one shorter for the left ear speaker—along with a high-quality flexible cable for the microphone.

To install the product on your helmet, Peel off the adhesive backing from the Bluetooth kit (the rectangular enclosure) and attach it to the left side of the helmet.

Remove the adhesive backing from the speakers and place them inside the helmet, in the ear areas. (If your helmet has a pre-designed speaker compartment, remove the foam padding first, then attach the speakers.) After completing these steps, connect the two AUX cables to the speakers. Then, conceal the cables neatly.

Note: Ensure the cables are installed and hidden in a way that avoids pressure or disconnection.

If you have a fixed-jaw helmet, you can conceal the microphone in your preferred position. If you have a jawless or movable-jaw helmet, simply position the microphone in front of your face. Speakers Microphone

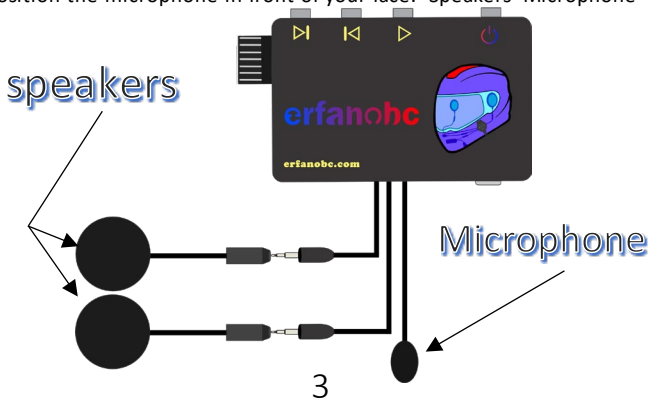

Warranty Page

Dear Customer, To activate the one-year warranty, please email your family name, phone number, and product code to the following Gmail address: erfanoobcc@gmail.com

With utmost respect, please note that failure to submit the above information within one week will result in the warranty not being applicable to your product.

Warranty Duration: One Year (from the date of purchase)

Warranty Coverage: Water ingress into the Bluetooth kit - Any spontaneous malfunctions - Any disconnection or issue in any part prior to installation - Any problem arising without human interference

Warranty Exclusions: Failure to submit the requested information within the specified time - Unauthorized opening of the device - Any damage to the speakers (e.g., water ingress, impact, etc.) - Any physical damage to the Bluetooth kit - Abnormal deformation of any part (e.g., due to heat, cold, etc.) - Disconnections or issues caused by improper installation - Absence of an invoice or stamped warranty card from the seller - Expiration of the warranty period

Contacting After-Sales Service: For assistance, please refer to the contact number or Gmail address listed in the catalog.

Note 1: The customer is responsible for all costs related to shipping the product to the warranty center and its return.

Note 2: The invoice or stamped warranty card from the seller must be sent along with the faulty device.

Bluetooth Helmet Kit by Erfanoobcc Cod Delivered on by
Mr./Store to

Signature / Stamp

We sincerely appreciate your purchase and look forward to serving you again.